

ASSEMBLING INSTRUCTION

HEADLIGHT COVER KIT AFRICA TWIN '19

HA1300-19A-B


KIT

- X1. BRACKETS KIT
- X1. HEADLIGHT COVER
- X1. THREADED TURNED H60MM
- X2. M5X12
- X2. M6X25
- X2. THICKNESS H8MM
- X4. NEOPRENE SQUARE

WWW.BARRACUDAMOTO.COM

ASSEMBLING PROCEDURE:

1. ASSEMBLE THE THE SPECIFIC BRACKETS TO THE HEADLIGHT COVER USING THE SUPPLIED THREADED TURNED AND THE M5X12, AS SHOWN.
2. MOUNT THE PREVIOUSLY ASSEMBLED COVER TO THE BRACKET PLACED UNDER THE HEADLIGHT USING THE SUPPLIED BOLTS, AS ILLUSTRATED.
IMPORTANT: THE COVER MUST BE FAR FROM THE HEADLIGHT AT LEAST 1CM, TO AVOID ANY TYPE OF DAMAGE TO THE ORIGINAL HEADLIGHT.
3. CUT THE NEOPRENE AND PLACE IT ON POSSIBLE TOUCHING POINTS WITH THE HEADLIGHT, TO AVOID DAMAGES.
4. TIGHTEN EVERYTHING.

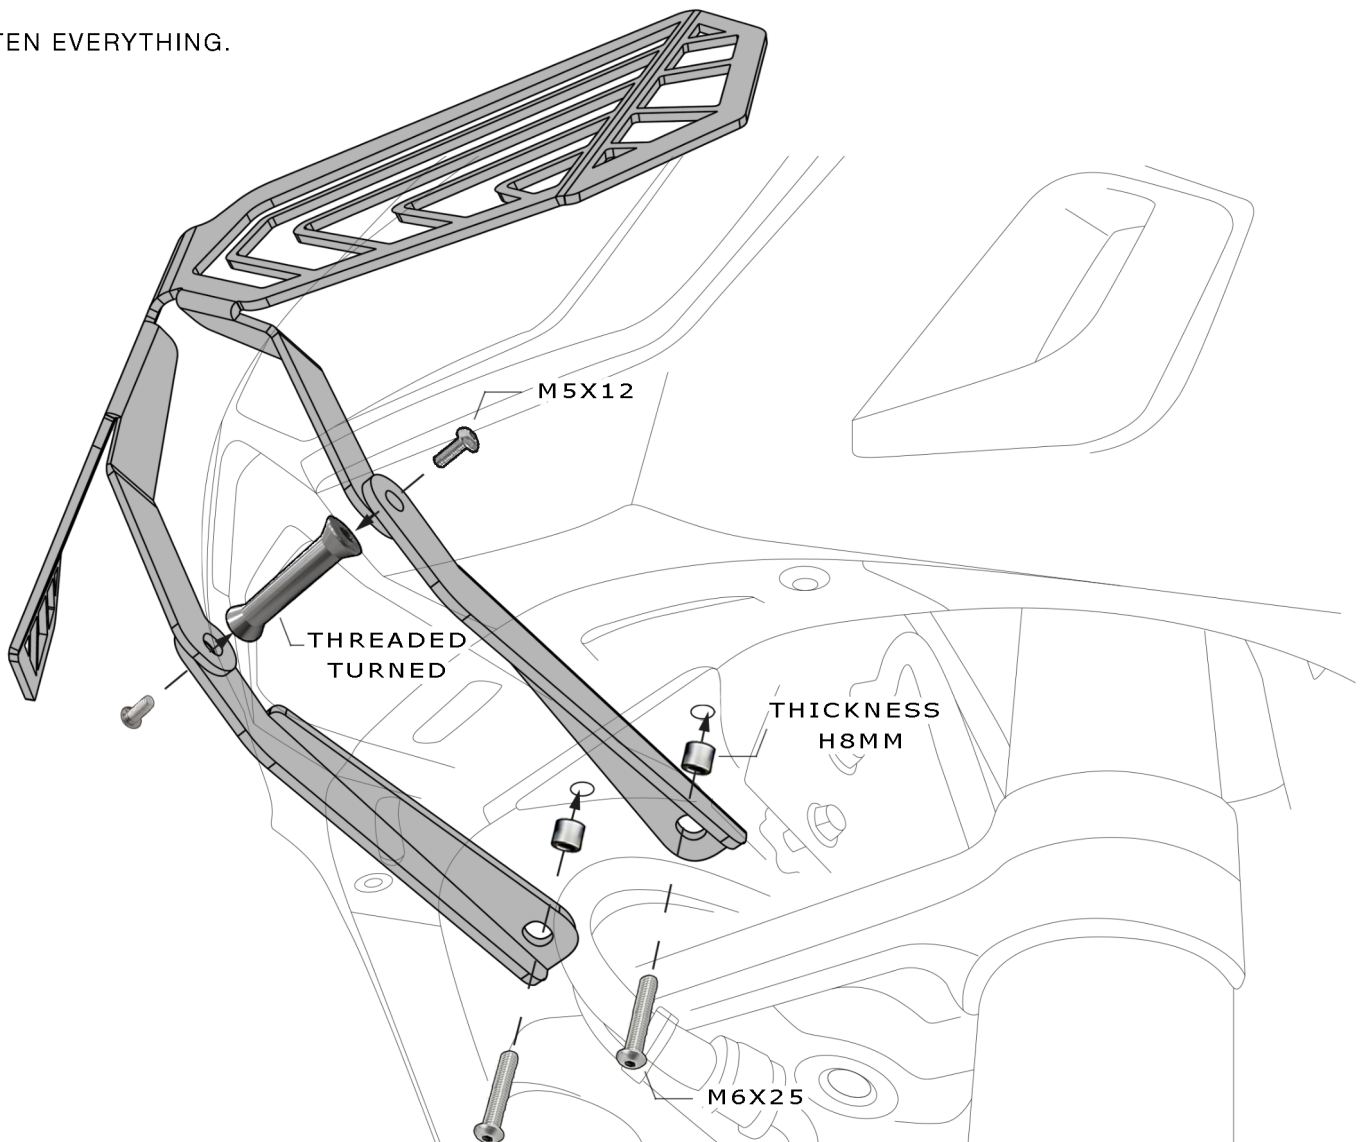

IMPORTANT: COD. HA1300-19 NOT COMPATIBLE WITH OEM FRONT TUBULAR PROTECTION. THE HEADLIGHT PROTECTION WAS DEVELOPED FOR OFF-ROAD USE. BARRACUDA IS NOT RESPONSABLE FOR ANY OTHER TYPE OF USE.